



# EUROCOMACH®

SKID LOADER

ESK

130.4



Engine CUMMINS

A-1700

Displacement

cc 1700

Max power

Kw 28 - Hp 38,1

Weight

Kg 1830



# EUROCOMACH®

**Innovative design, power, hydraulic capacity, un-stoppable. From Eurocomach quality of design comes another concrete solution:  
Skid steer loader ESK 130.4**



SKID LOADER  
**ESK** 130.4



SKID LOADER

130.4



## VERSATILITY

Why should we call it simply skid loader, if it can become the most valuable ally of an intense day of work, thanks to its big range of equipments with quick coupling? Pallet forks, special buckets, grippers, sweepers, blades and also asphalt-cutting millers, and snow turbines thanks to the High Flow electro-hydraulic circuit (optional). One single machine with endless possibilities.





# SKID LOADER

# 130.4

## COMFORT / VISIBILITY

The new generation of Eurocomach skid steers has been studied and manufactured in order to guarantee the operator satisfaction.

Servo controlled joysticks offer a full control of movements that become fast and immediate, requiring the least effort.

The driver's seat is spacious and comfortable with double security bar, it is in an advanced position and it allows a perfect visibility of the operative field during every work phase, even while unloading. This is due to the fact that the dashboard with diagnostic instruments is placed at the joysticks side.



Closed cabin (optional) with heating system increases the machine use possibilities in every climatic condition.

Thanks to the sliding door, access to driver's seat is quick and immediate, without obstacles.



## MAINTENANCE / FILLING UP POINTS

All there is to do is to open the rear panel and everything is within reach in order to carry out the simple but important maintenance operations without difficulties or waste of time (all filters can be reached easily). For an in-depth cleaning of oil-cooler, a new system of half-opening has been introduced that allows the partial division of oil-cooler from the rest of the engine.

The total accessibility to the inside of the machine is possible thanks to the cabin overturning, where the diesel engine, the transmission components and the whole hydraulic system are placed.



Simple and immediate is also the access to fuel and hydraulic oil supply tanks that are placed at the machine sides.






# SKID LOADER

# 130.4

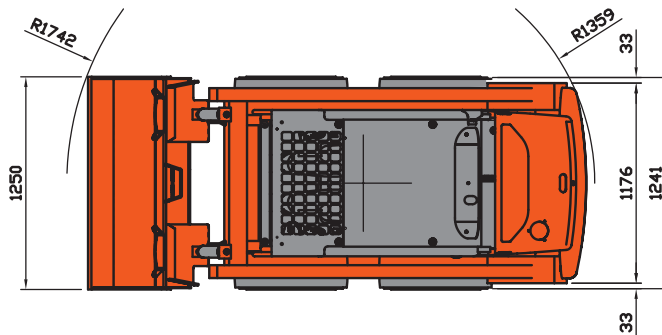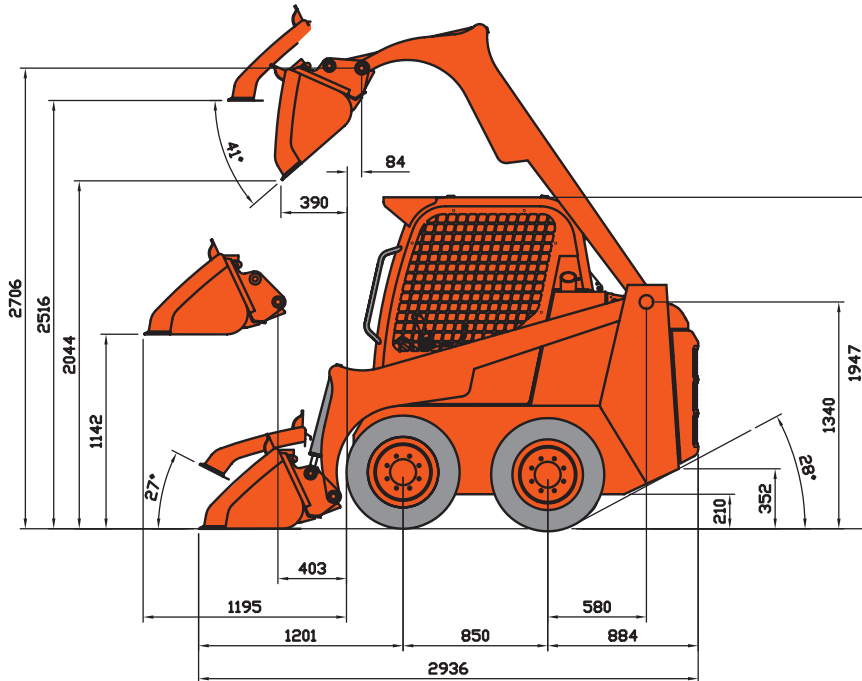

## Hydrostatic transmission

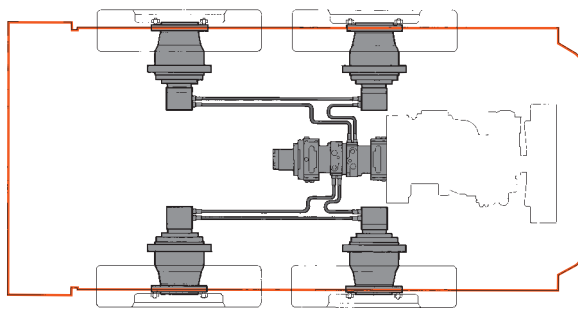

The gearboxes, compared with the traditional transmission by chain, which is subject to frequent repair and maintenance operations, have many advantages such as on elevated transfer speed (12 Km/h), homogenous distribution of the power directly on the wheels in favour of the force, a higher sensibility in the movements, the favourable possibility to work if need be, mounting old and new tyres on the same side without compromising the reliability of the machine.

## TECHNICAL SPECIFICATIONS

### MOTORE

Marca:	CUMMINS A 1700 FASE 3
Type	exhaust with indirect injection
Max power:	28 kW (38,1 HP) 2600 rpm
Max torque:	110 Nm 1600 rpm
Displacement :	1700 cc
Cylinders n°:	3 in line
Cooling system:	water
Filtering:	dry, with main cartridge, security and obstruction gauge

### TRANSMISSION

Type:	Hydrostatic with double pump and 4 gearboxes on the wheels type TRASMITAL-DANFOSS
Speed :	0÷12 km/h
Traction force:	1400 daN

### CONTROLS

Type:	Ergonomic joystick with security block on board
Translation:	Driven by left joystick
Services:	Driven by right joystick for lifting and bucket

Arrangement for fittings (standard): By pedal with trigger mechanism; 43 lt/min at 180 bar

Lifting mechanism: Self-levelling system for bucket (standard)

### BRAKES

Service brakes:	hydrostatic
Parking brakes:	negative with multiple disks into oil bath, integrated on the rear gearboxes at electrohydraulic control
Emergency brakes:	electrohydraulic, acting on the parking brakes (integrated on the rear gearboxes)

### ELECTRIC SYSTEM

Battery :	12V - Ah 80/550
Alternator :	12V - 45 A

### HYDRAULIC SYSTEM

Pump :	n.l with gears for services
Max capacity:	l/l' 43
Pressure:	bar 180
Distributor:	controlled by joystick "combined type"
Opzional High Flow	l. 65

### CAPACITIES

Engine oil:	kg	5.0
Water coolant:	l.	12
Fuel tank:	l.	48
Hydraulic oil tank:	l.	44
Hydraulic circuit:	l.	15

### LIFTING DATA

Useful carrying capacity:	490 kg - 0.28 m <sup>3</sup>
Upsetting load:	kg 750
Shovel width:	mm 1250
Teeth breakout force:	kg 1300
Weight:	kg 1830

- ROPS ISO 3471 and FOPS 1st level ISO 3449 homologated cabin
- Front and back working lights



## STANDARD EQUIPMENTS

- |                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"><li>• CUMMINS 38,1 HP water-cooled engine</li><li>• ROPS FOPS canopy with rear and top windows</li><li>• Hydrostatic transmission with double pump (variable flow)</li><li>• Front hydraulic prearrangement</li><li>• Universal quick coupling plate (for bucket and equipments)</li><li>• Front bucket capacity m<sup>3</sup> 0,28 and width mm 1250</li><li>• Adjustable seat with seat belt and safety bar</li></ul> | <ul style="list-style-type: none"><li>• Self-levelling system (acting on slope only)</li><li>• Fixed side windows for canopy</li><li>• N. 1 rear working light</li><li>• Magnetic rotating lamp</li><li>• Rear view mirrors right and left</li><li>• 12V electric outlet</li><li>• Accelerator by pedal and/or lever</li><li>• Electrohydraulic automatic handbrake</li><li>• Tool box with spare parts catalogue and use and maintenance manual</li></ul> |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## OPTIONAL EQUIPMENTS

- |                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"><li>• Electrohydraulic high flow prearrangement (65 lt/min at 180 bar) for asphalt cutting miller</li><li>• 4 in 1 bucket</li><li>• Concrete mixing front bucket</li><li>• Hydraulic sweeper bucket</li><li>• Sliding side windows for canopy</li><li>• Closed cabin with sliding side windows and door with windscreen wiper and heating system</li><li>• Front excavator with controls in the cabin</li><li>• Pallet forks</li></ul> | <ul style="list-style-type: none"><li>• Snow blade</li><li>• Dozer</li><li>• Drill with quick coupling plate</li><li>• Hydraulic demolition hammer with quick coupling plate</li><li>• Puncture-proof filling for tyres</li><li>• Snow turbine</li><li>• Floating system</li><li>• Reverse buzzer</li><li>• Rear additional ballasts</li></ul> |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|



**COMPANY  
WITH QUALITY SYSTEM  
CERTIFIED BY DNV  
= UNI EN ISO 9001:2000 =**

**SAMPIERANA s.p.a.**

I - 47026 SAN PIERO IN BAGNO (FC)

Via Leonardo Da Vinci, 40

Tel. +39 0543.904211 - Fax +39 0543.903108

www.sampierana.com - info@sampierana.com

Dealer: